



HAL
open science

Combining flow-MRI method and modeling approach to assess water fluxes in tomato plant architecture

Jeanne Simon, Maida Cardoso, Eric Alibert, Pierre Valsesia, Gilles Vercambre, Jean Luc Verdeil, Christophe Coillot, Christophe Goze-Bac, Nadia Bertin

► To cite this version:

Jeanne Simon, Maida Cardoso, Eric Alibert, Pierre Valsesia, Gilles Vercambre, et al.. Combining flow-MRI method and modeling approach to assess water fluxes in tomato plant architecture. MRIFood, Sep 2018, Rennes, France. 2018. hal-02785661

HAL Id: hal-02785661

<https://hal.inrae.fr/hal-02785661>

Submitted on 4 Jun 2020

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Combining flow-MRI method and modeling approach to assess water fluxes in tomato plant architecture

Jeanne Simon^{1,2}, Maida Cardoso², Eric Alibert², Pierre Valsesia¹, Gilles Vercambre¹, Jean-Luc Verdeil³, Christophe Coillot², Christophe Goze-Bac² and Nadia Bertin¹

¹ Institut National de la Recherche Agronomique (INRA), PSH (UR 1115), Avignon, France ; ² Charles Coulomb Laboratory (L2C-BioNanoMRI team), UMR 5221 CNRS -University, Montpellier, France ; ³ Centre de Coopération Internationale en Recherche Agronomique pour le Développement (CIRAD), UMR AGAP, Montpellier, France



jeanne.simon@inra.fr




INTRODUCTION

Water and carbon status throughout growth and development are tightly controlled by the plants and are key components of their response to environmental stresses. Measuring and predicting resource availability and transport within intact plants is a challenge.


The objective of this study is to compare the flow-MRI measurements to the prediction of a functional-structural plant model in order to explore the relevance of this MRI method to analyze the plant responses to abiotic stresses and map the resource availability.

RESULTS

Flow-MRI measurements

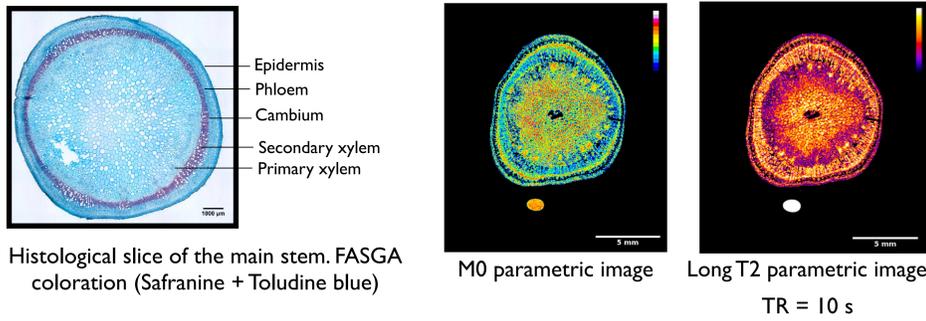


Histological slice of the main stem. FASGA coloration (Safranin + Toluidine blue)

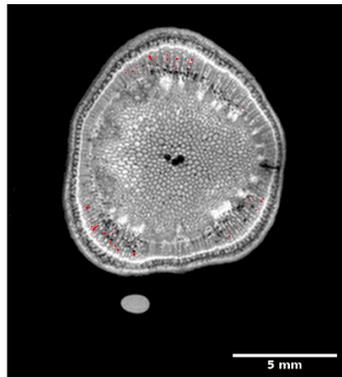

Inflow MRI image. TR = 1200 ms. Thk = 0.5 mm. TE = 12 ms.

The red areas represent the active vessels during flow-MRI measurements.

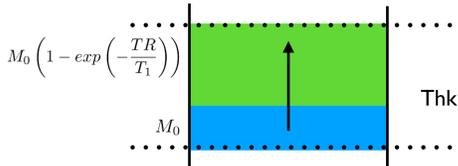


Active surface = 0.23 mm² and $v = 0.33$ mm/s

Xylem fluxes = 0.076 mm³/s giving 0.27 g/h

Model predictions

Model predictions of xylem fluxes in the MRI conditions, on a virtual plant with the same aerial architecture as the measured plant, and at the same position on the stem : under the third truss.

The assumption made by the model at night is that the fluxes are only due to fruit activity and that the leaves do not transpire.

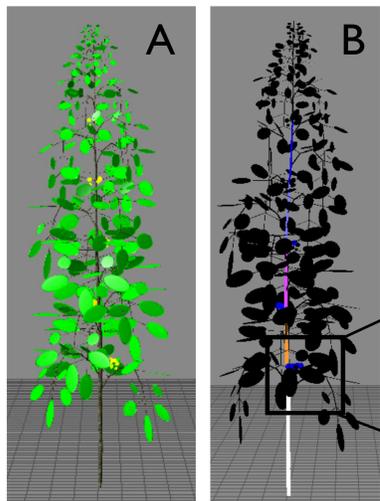

Xylem fluxes predicted at the beginning of the experiment:
0.035 mm³/s giving 0.13 g/h
Xylem fluxes predicted after three days of extended night:
0.048 mm³/s giving 0.17 g/h

3D representation of the whole computed plant (A) and 3D mapping of relative flow (B) in the whole plant at night at the beginning of the experiment. (C) Zoom on the first truss.

Relative flow

MATERIALS AND METHODS


Flow-MRI method

We used a novel flow-MRI method involving the slice selectivity in the context of a multi slice spin echo sequence [1]. Two pulse sequences measuring a slice inflow and outflow weighted are performed, allowing slow flow sensitive imaging. The experiments have been performed on a Agilent MRI scanner working at 9.4T. A ¹H MRI openable saddle-coil tuned at 400MHz has been designed to fit the stem of plants [2].

We applied this method to the main stem of a tomato plant (cv :WVA106), under the third truss. Histological measurements were performed after the MRI experiment.



Openable saddle-coil



Openable saddle-coil around the stem of a tomato plant




Agilent MRI scanner 9.4T

Environmental conditions

The plant is placed horizontally inside the MRI scanner. The experiments were performed during three consecutive days with no light (extended night conditions). The temperature in the MRI scanner is 20°C.

Plant model

We ran a bio physiological functional-structural plant model [3] until the computed plant achieved the same architecture as the investigated plant. Then, the MRI environmental conditions were reproduced in order to analyze the fluxes predicted under the third truss.



Schematic representation of how the model describes the network of source and sink organs as well the transport of resources within this network [3]

CONCLUSION AND PERSPECTIVES

The flow-MRI method allows us to measure water fluxes in slow flow conditions. The measurements are in agreement with the predictions of the plant model in the same environmental conditions.

These results confirm that this method will be a useful tool to analyse plant responses to abiotic stresses and will help to improve the plant model.

Perspectives

- Add some echoes to increase the SNR and have better chances to see phloem fluxes.
- A new ¹H MRI probe as been designed to fit the fruit pedicel plants which will allow us to measure the fluxes going to the fruit.
- The acquisition of a new vertical MRI scanner 3T will allow us to make measurements in better environmental conditions and during longer time periods.



Helmholtz coil designed for the fruit pedicel



REFERENCES

- [1] : Buy S., Le Floch S., Tang N., Sidiboulouar R., Zanca M., Canadas P., Nativel E., Cardoso M., Alibert E., Dupont G., Ambard D., Maurel C., Verdeil J.-L., Bertin N., Goze-Bac C., Coillot C. 2018. Flip-flop method: A new T1-weighted flow- MRI for plants studies. PLoS ONE 13(3): e0194845. doi: 10.1371
- [2] : Coillot C., Sidiboulouar R., Nativel E., Zanca M., Alibert E., Cardoso M., Saintmartin G., Noristani H., Lonjon N., Lecorre M., Perrin F. and Goze-Bac C., Signal modeling of an MRI ribbon solenoid coil dedicated to spinal cord injury investigations, J. Sens. Syst., 5, pp. 137–145, (2016).
- [3] : Baldazzi V., Pinet A., Vercambre G., Bénard C., Biais B., Génard M. 2013. In-silico analysis of water and carbon relations under stress conditions. A multi-scale perspective centered on fruit. Front. Plant Sci., doi: 10.3389

ACKNOWLEDGMENTS

This work has been carried out thanks to the support of the « Investissements d'avenir » programme (Labex Agro:ANR-10-LABX-0001-01), under the frame of I-SITE MUSE (ANR-16-IDEX-0006).